




装配例

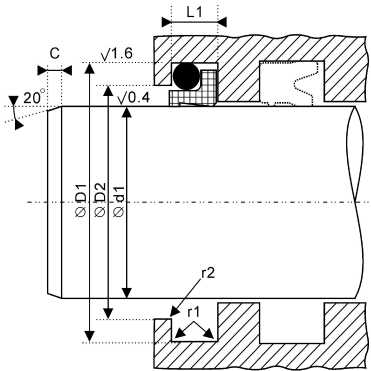

型式例

截面图	材料	温度范围	速度	特点	代号
	NBR	-30至100	15	防尘效果好，用于高速	F10
	FKM	-20至200			

尺寸	公差
ΦD1	H10
L1	±0.2

d1	D1	L1	O型圈规格			d1	D1	L1	O型圈规格			d1	D1	L1	O型圈规格		
5	9.8	3.7	6.7	x	1.8	45	51.8	5	47.29	x	2.62	97	109.2	8.1	101.2	x	3.53
6	10.8	3.7	7.65	x	1.78	45	53.8	6.3	48.9	x	2.62	99	111.2	8.1	104.4	x	3.53
8	12.8	3.7	9.5	x	1.8	49	55.8	5	50.47	x	2.62	100	108.8	6	101.2	x	3.53
10	14.8	3.7	11.8	x	1.8	50	56.8	5	52.07	x	2.62	100	108.8	6.3	101.3	x	2.62
12	18.8	5	13.94	x	2.62	50	58.8	6.3	53.64	x	2.62	100	112.2	8.1	104.4	x	3.53
14	20.8	5	15.54	x	2.62	50.8	57.6	5	52.07	x	2.62	105	113.8	6	107.5	x	3.53
15	21.8	5	17.12	x	2.62	54	60.8	5	55.25	x	2.62	105	117.2	8.1	110.7	x	3.53
16	20.8	3.7	17.17	x	1.78	55	61.8	5	56.82	x	2.62	110	118.8	6	110.7	x	3.53
16	22.8	5	18	x	2.65	55	63.8	6.3	58.42	x	2.62	110	118.8	6.3	114	x	2.62
18	22.8	3.7	19	x	1.8	56	62.8	5	58.42	x	2.62	110	122.2	8.1	113.9	x	3.53
18	24.8	5	20.29	x	2.62	56	64.8	6.3	59.99	x	2.62	115	123.8	6	117.1	x	3.53
20	26.8	5	21.89	x	2.62	60	66.8	5	61.6	x	2.62	115	127.2	8.1	120.2	x	3.53
20	27.6	4.2	21.89	x	2.62	60	68.8	6.3	63.17	x	2.62	120	128.8	6	120.2	x	3.53
22	28.8	5	23.47	x	2.62	63	69.8	5	64.77	x	2.62	120	132.2	8.1	123.4	x	3.53
25	31.8	5	26.64	x	2.62	63	71.8	6.3	66.34	x	2.62	125	133.8	6	126.6	x	3.53
25	32.6	4.2	28.24	x	2.62	65	73.8	6	66.27	x	3.53	125	133.8	6.3	126.7	x	2.62
28	34.8	5	29.82	x	2.62	65	73.8	6.3	67.95	x	2.62	125	137.2	8.1	129.8	x	3.53
28	35.6	4.2	29.82	x	2.62	70	78.8	6	72.62	x	3.53	125.4	137.6	8.1	129.8	x	3.53
30	34.8	3.7	31.47	x	1.78	70	78.8	6.3	72.69	x	2.62	130	138.8	6	132.9	x	3.53
30	36.8	5	31.42	x	2.62	70	82.2	8.1	75.79	x	3.53	130	142.2	8.1	136.1	x	3.53
30	37.6	4.2	32.99	x	2.62	75	83.8	6	75.79	x	3.53	135	143.8	6	136.1	x	3.53
32	38.8	5	34.59	x	2.62	75	87.2	8.1	78.97	x	3.53	135	147.2	8.1	139.3	x	3.53
32	39.6	4.2	34.59	x	2.62	80	88.8	6	82.14	x	3.53	137	145.8	6	139.3	x	3.53
35	41.8	5	36.17	x	2.62	80	88.8	6.3	82.22	x	2.62	140	148.8	6	142.5	x	3.53
36	42.8	5	37.77	x	2.62	80	92.2	8.1	85.32	x	3.53	140	152.2	8.1	145.6	x	3.53
36	43.6	4.2	37.77	x	2.62	85	93.8	6	83.52	x	3.53	140	156	9.5	145.4	x	5.33
37	43.8	5	39.34	x	2.62	85	97.2	8.1	88.49	x	3.53	140.5	156.5	9.5	145.4	x	5.33
40	46.8	5	42.52	x	2.62	90	98.8	6	91.67	x	3.53	145	153.8	6	145.6	x	3.53
40	48.8	6.3	44.12	x	2.62	90	98.8	6.3	94.92	x	2.62	150	158.8	6	152	x	3.53
42	48.8	5	44.12	x	2.62	90	102.2	8.1	94.84	x	3.53	150	166	9.5	151.8	x	5.33
42	50.8	6.3	45.69	x	2.62	95	103.8	6	98.02	x	3.53	153	169	9.5	158.1	x	5.33

Z形四氟防尘圈 F10



d1	D1	L1	O型圈规格			d1	D1	L1	O型圈规格			d1	D1	L1	O型圈规格		
155	171	9.5	158.1	x	5.33	250	266	9.5	253.4	x	5.33	560	584	14	557.7	x	7
160	168.8	6	158.3	x	3.53	260	272.2	8.4	253.6	x	5.33	600	616	11	608.1	x	7
160	172.2	8.1	164.7	x	3.53	260	276	9.5	266.1	x	5.33	600	624	14	608.1	x	7
160	176	9.5	164.5	x	5.33	270	286	9.5	278.8	x	5.33	630	646	11	633.5	x	7
165	181	9.5	170.8	x	5.33	280	292.2	8.1	279	x	3.53	650	677.3	16	649	x	8.4
170	178.8	6	171	x	3.53	280	292.2	8.4	278.8	x	5.33	680	700	14	680	x	8.4
170	186	9.5	177.2	x	5.33	280	296	9.5	278.8	x	5.33	680	707.3	16	680	x	8.4
175	191	9.5	177.2	x	5.33	300	312.2	8.4	304.2	x	5.33	700	720	14	705	x	8.4
180	188.8	6	177.4	x	3.53	300	316	9.5	304.2	x	5.33	700	727.3	16	715	x	8.4
180	192.2	8.1	183.7	x	3.53	320	332.2	8.1	329.8	x	3.53	770	790	14	774.1	x	8.4
180	196	9.5	183.5	x	5.33	320	332.2	8.4	329.6	x	5.33	770	797.3	16	774.1	x	8.4
188.2	204.2	9.5	189.9	x	5.33	320	336	9.5	329.6	x	5.33	785	812.3	16	810	x	8.4
190	198.8	6	190.1	x	3.53	330	346	9.5	329.6	x	5.33	800	827.3	16	810	x	8.4
190	206	9.5	196.2	x	5.33	350	362.2	8.4	355	x	5.33	810	837.3	16	810	x	8.4
192	208	9.5	196.2	x	5.33	350	366	9.5	355	x	5.33	828	848	14	830	x	8.4
200	208.8	6	202.8	x	3.53	360	372.2	8.1	355.2	x	3.53	880	900	14	888	x	8.4
200	212.2	8.1	202.8	x	3.53	360	372.2	8.4	355	x	5.33	900	920	14	904	x	8.4
200	216	9.5	202.6	x	5.33	360	376	9.5	365	x	5.3	900	927.3	16	910	x	8.4
210	218.8	6	209.1	x	3.53	370	382.2	8.4	365	x	5.3	950	977.3	16	959.1	x	8.4
211	227	9.5	215.3	x	5.33	380	396	9.5	380.4	x	5.33	1000	1027	16	1010	x	8.4
220	228.8	6	221.8	x	3.53	400	412.2	8.4	405.3	x	5.33	1030	1050	14	1035	x	8.4
220	232.2	8.1	221.8	x	3.53	400	424	14	405.3	x	7	1040	1067	16	1050	x	8.4
220	236	9.5	221.6	x	5.33	440	456	11	443.4	x	7	1130	1157	16	1140	x	8.4
230	238.8	6	228.2	x	3.53	440	464	14	443.4	x	7	1180	1200	14	1185	x	8.4
240	248.8	6	240.9	x	3.53	450	474	14	456.1	x	7	1200	1227	16	1210	x	8.4
240	256	9.5	247	x	5.33	480	496	11	481.5	x	7	2600	2627	16	2610	x	8.4
250	258.8	6	253.6	x	3.53	480	504	14	481.5	x	7						
250	262.2	8.1	253.6	x	3.53	500	524	14	506.9	x	7						